



MacBook Air 11" Late 2010 Battery Replacement

Internal prerequisite.


Written By: Andrew Bookholt



INTRODUCTION

Internal prerequisite.

Step 1 — Battery

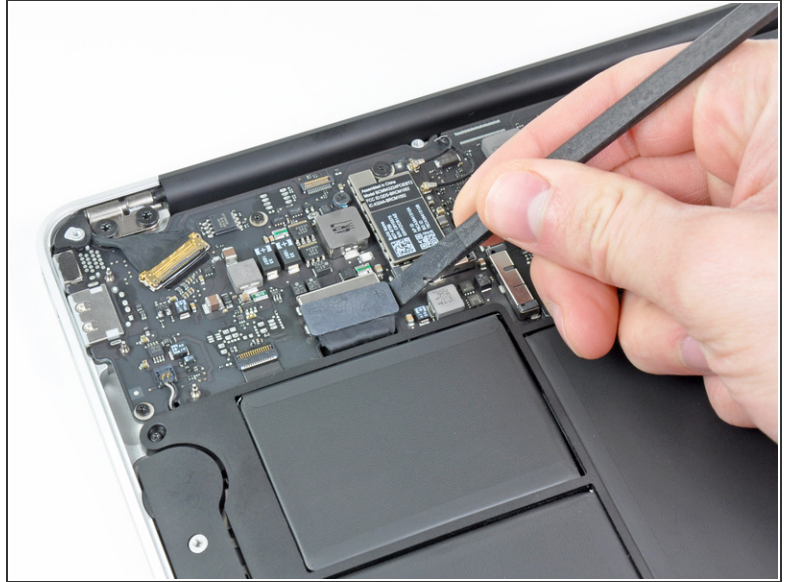

In this step you will disconnect the battery to help avoid shorting out any components during service.

- Use the flat end of a spudger to pry both short sides of the battery connector upward to disconnect it from its socket on the logic board.
- Bend the battery cable slightly away from the logic board so the connector will not accidentally contact its socket.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 02:48:58 PM.